



TDCR - Troffer Dish Circular Recessed

Specification-Grade Recessed Static Circular Lensed Drywall Luminaire

Photometrics - Please consult www.viscor.com for photometric results.

ProductDetails

Dimensions

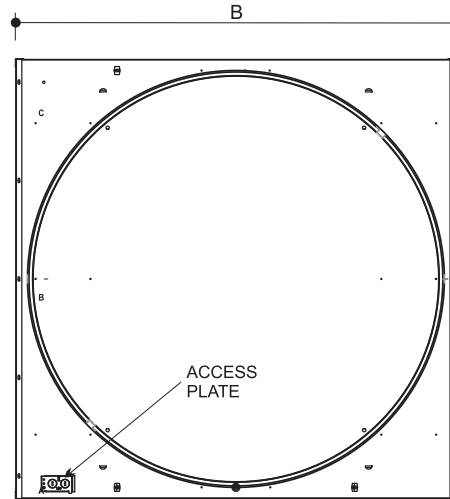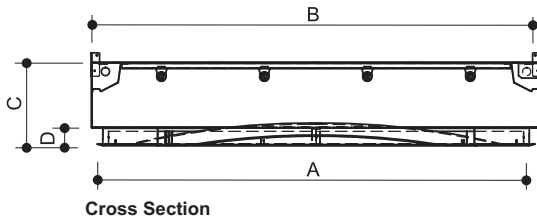

MODEL	A	B	C	D
1x1	10 3/4"	12"	8 7/8"	1 7/8"
2x2	22 3/4"	24"		
3x3	34 3/4"	36"		
4x4	46 3/4"	48 1/16"		

ARCHITECTURAL LIGHTING

Ordering



Size (Width x Length)

1x1
2x2
3x3
4x4

No. of Lamps

1L
2L
3L
4L
6L
8L

Lamp Watts

See table below

Lamp Type

T5
T5HO
T8
PLL

Voltage

120 - 120V
347 - 347V
UNV - 120-277V
UN4 - 347-480V

Ballast Type

N - Instant Start
P - Prog. Start
R - Rapid Start

- Ballast Options**
(See Option Code Section For More Information)
- B01 Ballast Disconnect - In-line Power Disconnect (CSA-UL Req'd For Voltages above 150v)
 - B02 Dimming Addressable Digital (dali)
 - B03 Dimming Low Voltage
 - B04 Dimming Line Voltage
 - B08 Ballast - High Ballast Factor
 - B09 Ballast - Low Ballast Factor
 - B30 Emergency Lighting Battery Pack Spec Grade
 - B33 Emergency Lighting Battery Pack 1-lamp
 - B34 Emergency Lighting Battery Pack 2-lamp

- Housing Options**
- C06 Housing 20 Gauge Riveted
 - C07 Housing 20 Gauge Welded

- Packaging Options**
- K0 Pack Bulk

- Lens and Shielding Options**
(Concave Acrylic Lens Is Standard)
- P04 Flat Acrylic Lens

- Wiring Options**
- V25 Radio Frequency Filter
- Other options may be available.*

Example:

TDCR2x24L-T5HO54PUNV-B01C06V25

Lamp Watts

Size	Nom. Lamp Watts			
	T5	T5HO	T8	PLL/Biax
1x1 (300x300)				18 (1 or 2 lamps)
2x2 (600x600)	14 (2, 3 or 4 lamps)	24 (2 or 4 lamps)	17 (2, 3 or 4 lamps)	40, 50, 55 (2, 3 or 4 lamps)
3x3 (900x900)	21 (4 or 6 lamps)	39 (4 or 6 lamps)	25 (4 or 6 lamps)	
4x4 (1200x1200)	28 (2, 3 or 4 lamps)	54 (4, 6 or 8 lamps)	32 (2, 3 or 4 lamps)	

Certain configurations may not be available. Consult the factory for more information.