


MEZYF-M03

INSTALLATION INSTRUCTION SHEET

WARNING: ELECTRICAL SHOCK POTENTIAL !! DO NOT ATTEMPT TO INSTALL, MAINTAIN OR RELAMP WITHOUT DIS-CONNECTING ALL POWER, FAILURE TO DISCONNECT POWER CAN RESULT IN ELECTROCUTION, SHOCK OR SEVERE BURNS. ONLY QUALIFIED PERSONNEL TO CONDUCT ELECTRICAL INSTALLATION.


DRYWALL (SHEETROCK) CEILING OR WALL INSTALLATION INSTRUCTION:

DRYWALL (SHEETROCK) CEILING OR WALL OPENING:



Light source	14WT5 or 24WT5HO	21WT5 or 39WT5HO	28WT5 or 54WT5HO	21WT5 or 39WT5HO	28WT5 or 54WT5HO	21WT5 or 39WT5HO	28WT5 or 54WT5HO
Nominal fixture length	2ft	3ft	4ft	6ft	8ft	9ft	12ft
Actual fixture length	19.375"	31.187"	43.000"	60.875"	84.500"	90.562"	126.000"
Ceiling opening length A	19.500"	31.312"	43.125"	61.000"	84.625"	90.687"	126.125"


DWG 1

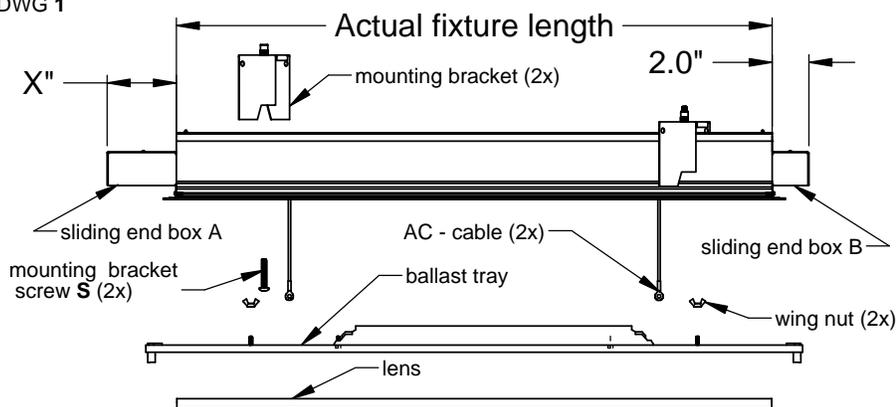


X"=4.0" for 2ft,3ft,4ft,6ft and 8ft nominal fixture length
X"=2.0" for 9ft and 12ft nominal fixture length

- Step 1:** Disconnect power.
step 2: Remove lens and ballast tray (detach AC-cable from ballast tray) (dwg1).
step 3: Loosen screws that hold end sliding boxes (A and B) and push boxes inside the fixture (dwg 2).
step 4: Install mounting brackets (2x) with screws S provided (dwg2).
step 5: Bring power through 7/8" hole on top of fixture.
step 6: Insert fixture into the ceiling / wall opening (for opening size refer to table provided) and slide end boxes outwards into original position.
step 7: Secure fixture to ceiling by tightening mounting bracket screws (2x) until fixture flange is flush with ceiling. Tighten end box screws (2x).
step 8: Hang ballast tray using AC-cables (2x) and wing nuts (2x) (provided).


DWG 2

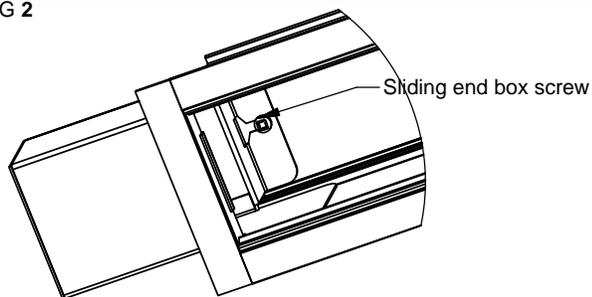

Top and side view of luminaire ready for installation.

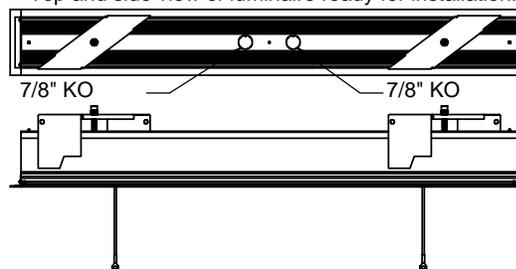

DWG 3

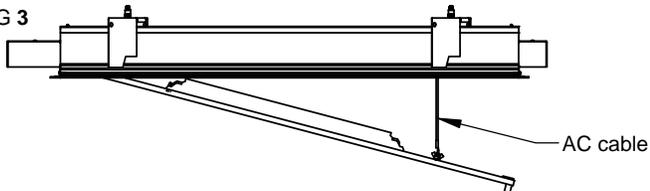

- step 9:** Make wiring connections according to local electrical code and Insert and secure ballast tray into the fixture starting at the deeper end box (dwg3)
step 10: Insert proper lamp* (supplied by others) and snap in lens.
step 8: Connect power.

*LAMP INSTALLATION ON 2ft,3ft AND 4ft NOMINAL LENGTH LUMINAIRE:

- Loosen ballast tray screws (4x) and slide ballast tray into deeper end box until opposite lamp holder is exposed.
- Install lamp starting at the lamp holder inside deeper end box.
- Slide ballast tray (c/w lamp) back in original position (so that lamp ends are evenly hidden inside end boxes) and tighten ballast tray screws (4x).

