

Project:	Catalogue #:	Type:
Notes:		

Product Description

The MD2 series by Certolux is an IC-rated specification-grade, luminaire which provides a cost-effective patient room lighting solution. Designed as a combination Ambient/Exam light for hospitals, nursing homes and other patient care facilities. Eliminates the need for wall mounted luminaires.

Feature Options

- Fastener Tamper Proof
- Emergency Battery Pack
- Lens & Reflector
- IP65 Rated

Housing

Precision formed, code gauge cold rolled steel. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment. Separated knockouts for line and low voltage connections. A gasketed wire access plate option is also available for easier installation. [See option code C33(G)].

Mounting

Surface Mount - Four 0.312" diameter holes provided. Grid Mount - Holes provided for chain mounting support to building structure, and comes with integral earthquake clips. Flange Mount - Yoke mounting bracket (see product ordering key).

LED

LED board arrays offered in various color temperatures and lumen packages. Optional Green LED arrays available on separate circuit (consult ordering key).

Lens

The exam compartment is shielded by a clear linear prismatic acrylic lens. The ambient compartment shield is a low profile frosted linear internal prismatic lens. Optional single piece aluminum door frame with lens for IP65 rating (see product ordering key).


Finish

The luminaire is a powder painted white matte finish and offers a high reflectivity coating for improved lighting performance and efficiency. Antimicrobial finish is optionally available.

Electrical

Long life LED's coupled with high efficiency drivers provide quality illumination. Rated to deliver an L80 performance >50,000 hours. The standard driver has a THD of <10%. Standard low-voltage dimming (0-10v, 1%). All electrical components are CSA or UL approved.

Warranty

5 year limited warranty. For complete warranty, click here: 




Approvals

- Approved to CSA and UL standards.
- UL listed for insulated ceilings.
- IP65 Option (see the ordering key)



Dimensions

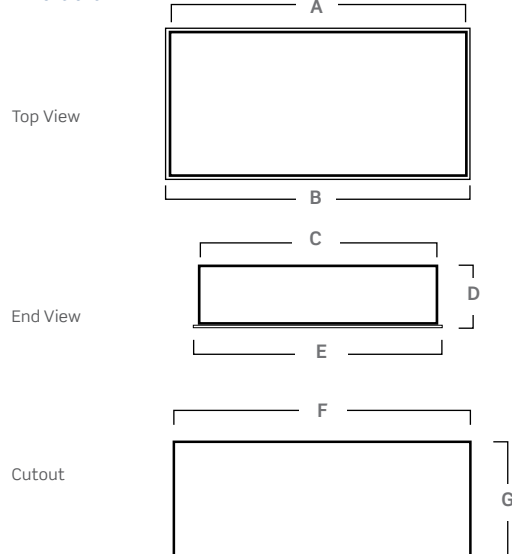


	Dimensions (inch) & Weights						
	A	B	C	D	E	F	G
IF - 2x2	23.75"	25.75"	23.75"	5.5"	25.75"	24.375"	24.375"
IF - 2x4	47.75"	49.75"	23.75"	5.5"	25.75"	48.375"	24.375"
IG - 2x2	23.75"	-	23.75"	5.5"	-	-	-
IG - 2x4	47.75"	-	23.75"	5.5"	-	-	-
IS - 2x2	24.00"	-	24.00"	5.5"	-	-	-
IS - 2x4	48.00"	-	24.00"	5.5"	-	-	-

Consult installation guide for exact dimensions.

Project:	Catalogue #:	Type:
Notes:		

Order Key

EXAMPLE: MD2IS-3461-2X4LED840K048L-935K116LUNV

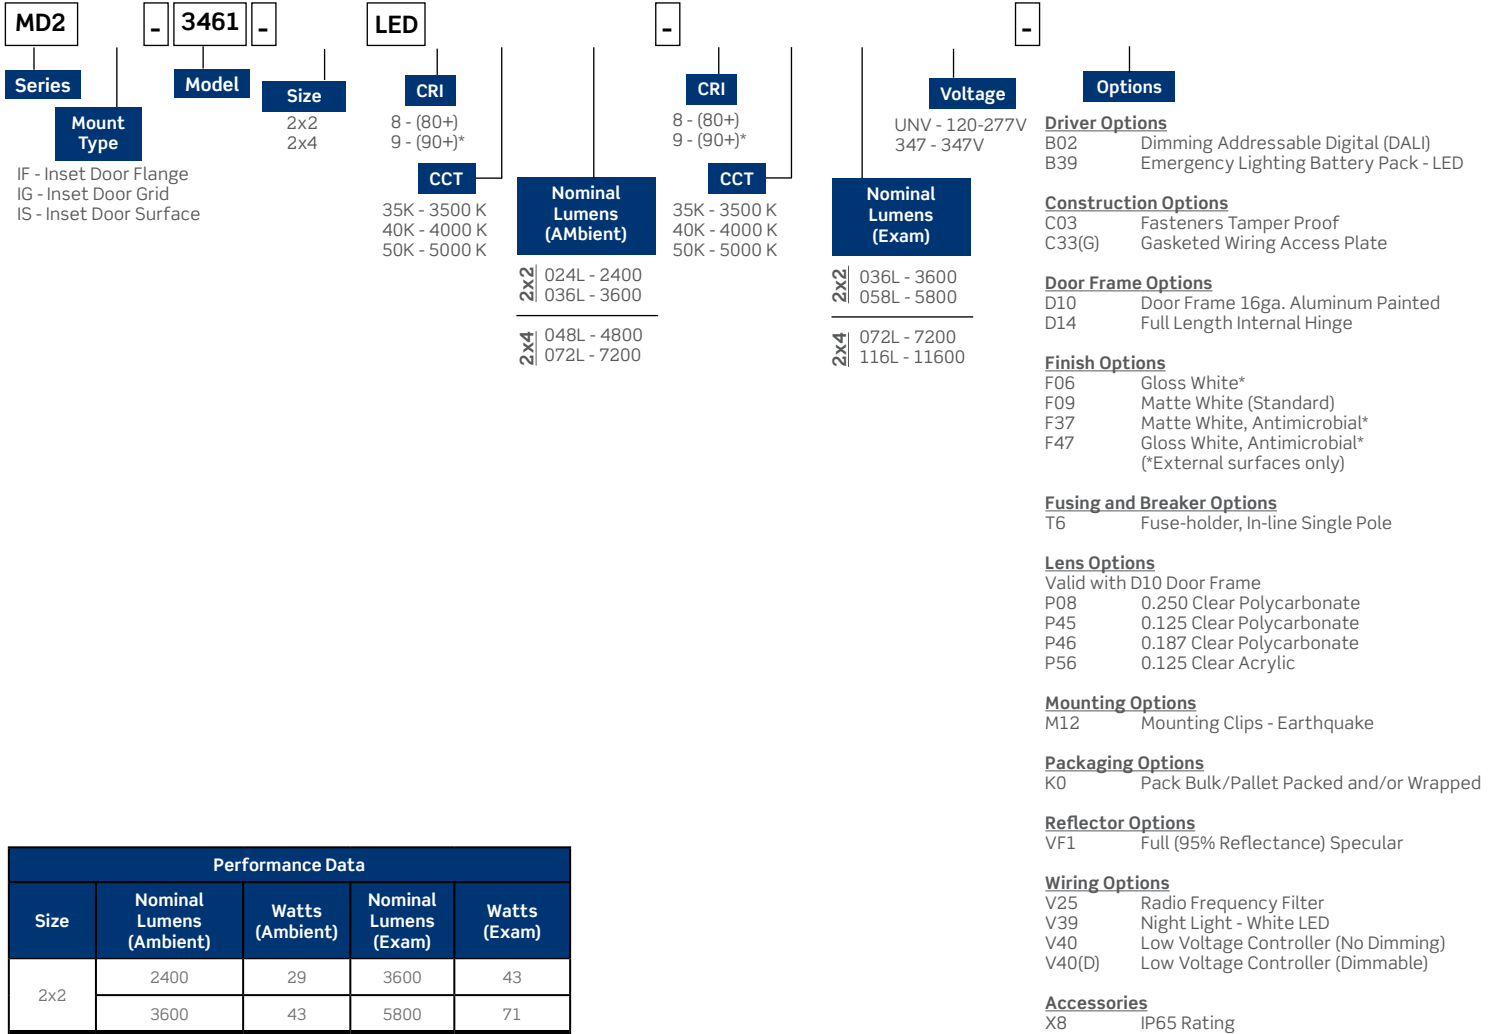

Performance Data				
Size	Nominal Lumens (Ambient)	Watts (Ambient)	Nominal Lumens (Exam)	Watts (Exam)
2x2	2400	29	3600	43
	3600	43	5800	71
2x4	4800	57	7200	87
	7200	87	11600	141

* 90+ CRI reduces lumen output by 20%, not available with 5000K.

Other options may be available, consult factory. Specifications and data subject to change without notice.