

Project
Type
Date
Cat #

## Application Features

Premium-grade, surface-mounted wrap-around ceiling luminaire. For use with indoor applications where low-cost, but commercial-grade ruggedness is required in applications where increased light output is necessary due to the maximum four lamp availability and wider housing.



## Specifications

### Optical System

Standard diffuser is a clear, prismatic pattern #12, acrylic lens.

### Mounting

Knock-outs are provided for stem-mounting. Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners. Mounts over electrical junction box. Offset mounting pads which keep luminaire level and slightly off of the mounting surface are formed within the housing.

### Construction

Die-formed, code gauge pre-painted, high-reflectance white steel housing. Inspection knockouts provided on four foot units, for mounting to junction box. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is centered in place on both ends by the screw fastened end caps.

### Finish

Pre-painted, high-reflectance white housing.

### Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

### Approvals

Approved to CSA and UL standards.

## Features

- Shallow design
- Available with 2 or 4 lamps (T5 and T8 configurations)
- Clear prismatic acrylic diffuser
- Easy squeeze and slide lens removal




## Options & Adders

- Dimmable and Emergency ballast
- Opal smooth white acrylic diffuser

## Applications

- Corridors
- Kitchens
- Office Areas
- Retail Stores and Supermarkets
- Stairwells
- Utility Areas

## Dimensions

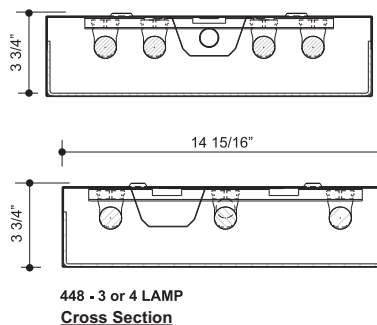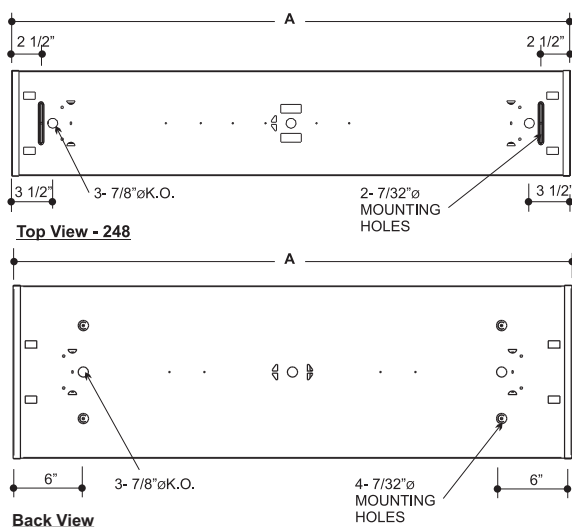

MODEL		LENGTH
2 LAMP	4 LAMP	A (in)
224	424	24
236	436	36
248	448	48

Project
Type
Date
Cat #

Photometrics - Please consult [www.viscor.com](http://www.viscor.com) for photometric results.

Ordering

DIP

-

-

Options

Typical Number of lamps in Cross Section

2  
4

Nom. Length (in.)

24  
36  
48

Tandem

(blank) - N/A  
T2 - Two Disjointed Housings

Lamp Watts

See Table below

Lamp Type

T5  
T5HO  
T8

Voltage

120 - 120V  
347 - 347V  
UNV - 120-277V  
UN4 - 347-480V

Ballast Type

N - Instant Start  
P - Program Start  
R - Rapid Start

Ballast Options

(See Option Code Section For More Information)

☐ B02 Dimming Addressable Digital (dali)  
☐ B03 Dimming Low Voltage (0-10v)  
☐ B04 Dimming Line Voltage  
☐ B08 Ballast - High Ballast Factor  
☐ B09 Ballast - Low Ballast Factor

Finish Options (white is standard)

☐ F01 Black

Packaging Options (select one only)

☐ K0 Pack Bulk/ Pallet Packed and/or Wrapped  
☐ K1 Pack Single

Lens and Shielding Options

(prismatic #P12 acrylic is standard)

☐ P04 Lens Smooth Opal Acrylic

Switch Option (select one)

☐ S1 Switch Pull Chain  
☐ S2 Switch Pull Chain - 3-way  
☐ S5 Switch Toggle  
☐ S6 Switch Turn

Approval and Rating Options

☐ X7 Dual CSA and USA Markets

Example:

DIP448-T832N120-3L

Lamp Watts

Length	Nominal Lamp Watts		
	T5	T5HO	T8
24	14	24	17
36	21	39	25
48	28	54	32

Other options may be available consult factory.

Specifications and data subject to change without notice.

INDUSTRIAL/COMMERCIAL LIGHTING