



Project
Type
Date
Cat #

Application Features

Specification-grade, fluorescent modular linear lighting luminaire. For use with indoor applications where continuous uniform row lighting minimizing "socket-end" dark spots is desired. This luminaire is suitable for individual or continuous row-mounting.

Specifications

Optical System

Standard diffuser is frosted extruded snap-in acrylic lens.

Mounting

Mounting bracket for recessed drywall applications.

Construction

Extruded aluminum housing. Diagonally overlapping lamps provide a uniform lighting pattern minimizing the "socket-end" dark spots. Standard lamp overlap is 4.5" (For drywall/sheetrock, ceiling or wall installation only).

Finish

Polyester powder painted housing.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Available with ceiling trim or spackle flange
- Available in 1 lamp model only
- Frosted extruded acrylic lens
- Continuous row-mounting capability
- Available in 4, 8 and 12 foot nominal length stand alone units

Options & Adders

- Louvers


Applications

- Office Areas
- Perimetres
- Retail Stores
- Corridors
- Classrooms
- Libraries
- Restaurants

INDUSTRIAL/COMMERCIAL LIGHTING

Dimensions

Configuration

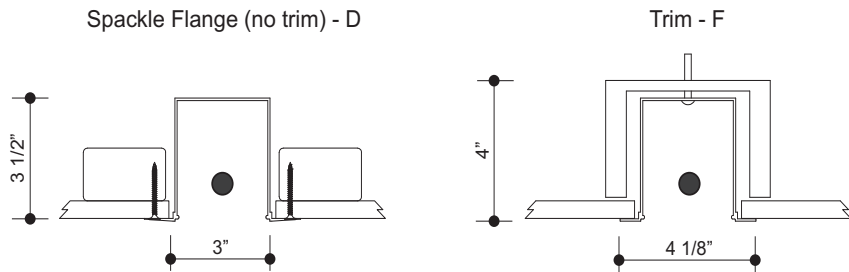

Project
Type
Date
Cat #

MEZY


MEZ Recessed Multi-Function

Specification-Grade Recessed Drywall Luminaire



Photometrics - Please consult www.viscor.com for photometric results.

Ordering

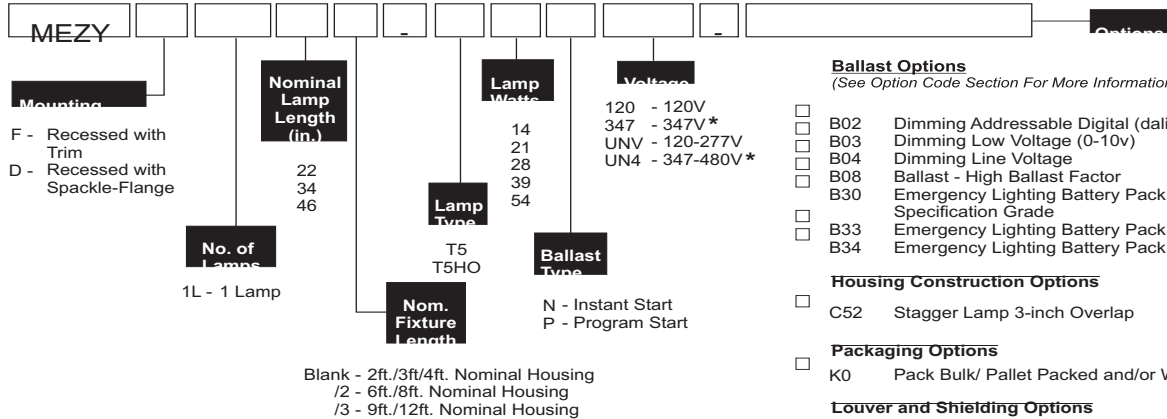

Length	Nominal Lamp Watts	
	T5	T5HO
22	14	24
34	21	39
46	28	54

Example:

MEZYF1L46-T528PUNV-M03

Other options may be available consult factory.
 Specifications and data subject to change without notice.

*Consult factory for availability.

Ballast Options

(See Option Code Section For More Information)

- B02 Dimming Addressable Digital (dali)
- B03 Dimming Low Voltage (0-10v)
- B04 Dimming Line Voltage
- B08 Ballast - High Ballast Factor Specification Grade
- B30 Emergency Lighting Battery Pack Specification Grade
- B33 Emergency Lighting Battery Pack 1-lamp
- B34 Emergency Lighting Battery Pack 2-lamp

Housing Construction Options

- C52 Stagger Lamp 3-inch Overlap

Packaging Options

- K0 Pack Bulk/ Pallet Packed and/or Wrapped

Louver and Shielding Options

(Linear Ribbed Extruded Lens is standard)

- L02 Baffle Parabolic Blade Semi-specular

Configuration

- M02 Beginning of Row (1 End)
- M03 Standalone (2 Ends)
- M05 Middle Section (No Ends)

Fusing and Breaker Options

(select one only)

- T5 Fuseholder, In-line Double Pole
- T6 Fuseholder, In-line Single Pole

Approval and Rating Options

- X7 CSA and USA Market

INDUSTRIAL/COMMERCIAL LIGHTING