

Project
Type
Date
Cat #

Application Features

Premium-grade, staggered T8 fluorescent strip luminaire. For use with indoor applications where continuous uniform row lighting without "socket-end" dark spots is desired (such as coves). Available in nominal lengths from 24 to 60 inches.



Specifications

Mounting

Mounting holes are provided.

Construction

Die and brake-formed, code gauge, pre-painted white steel. Single wireway cover on non-tandem units. Sufficient knockouts are provided on ends and back to accommodate multiple mounting configurations.

Finish

Pre-painted, high-reflectance white housing.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Heavy-duty construction
- Available with 1 or 2 lamps (T8 configurations)
- Designed specifically for row-mounting
- Overlapping lamps eliminate "socket-end" dark spots
- Available in lengths from 24 to 60 inches


Options & Adders

- Asymmetric, half or full reflector available in white or enhanced specular aluminum with a reflectance of 95%
- Multi-level switching
- Dimmable and Emergency ballast
- 20 gauge riveted construction
- In-line fuse holder

Applications

- Coves
- Valances
- Indirect Lighting

Dimensions

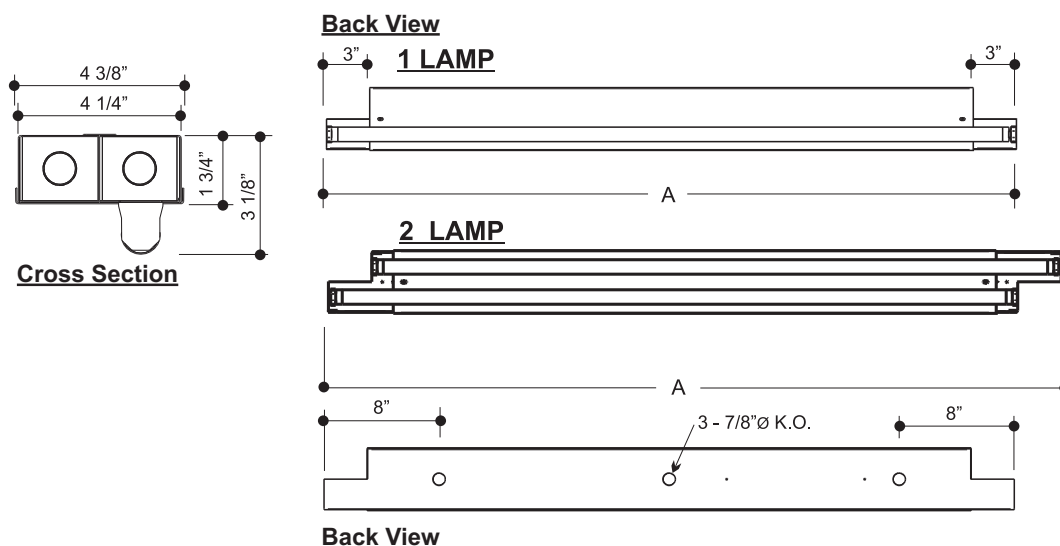

MODEL	NOMINAL LENGTH	ACTUAL LENGTH A (in.)
118	18	18
124	24	24
136	36	36
148	48	48
160	60	60
136/2	72	69
148/2	96	93

MODEL	NOMINAL LENGTH	ACTUAL LENGTH A (in.)
218	18	21
224	24	27
236	36	39
248	48	51
260	60	63
236/2	72	75
248/2	96	99

