

Project:	Catalogue #:	Type:
Notes:		

Product Description

LED premium-grade high or low bay fixture. Built with an impact resistant inverted conical dropdish, acrylic lens. This uniquely designed luminaire is available in three lumen packages and complements any industrial, commercial, or retail space.

Features

- Ideal for general purpose high or low bay applications
- Sleek design complements any interior
- 80+ CRI
- 4000K Standard
- Standard low-voltage dimming (0-10v)
- Hinged lens door frame

Applications

- Schools
- Warehouses
- Industrial/Commercial
- Showrooms
- Atrium/ Auditorium
- Retail
- Cafeteria

Featured Options

- Adjustable cable suspension available
- Mounting brackets for pendant

Optical System

Equipped with an inverted, conical dropdish lens. This impact resistant, acrylic lens is designed to optimize performance while minimizing glare.

Mounting

This luminaire is specifically designed for suspended mount applications. Must be mounted at least 16 inches below the surface (ceiling to bottom of luminaire).

Construction

Solid metal welded fabricated housing with integral ventilation slots and integral aluminum heatsink.

Finish

Polyester powder painted matte white finish is standard.

Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours at 40 degree celcius ambient temperature. CSA/UL approved electronic components.

Warranty

5 year limited warranty. For complete warranty terms visit:
https://www.viscor.com/en/docs/VISCOR_LED_WARRANTY.PDF


Approvals

Approved to CSA and UL standards.
Tested in accordance to IESNA LM-79.
Suitable for damp locations.

Approvals



Dimensions

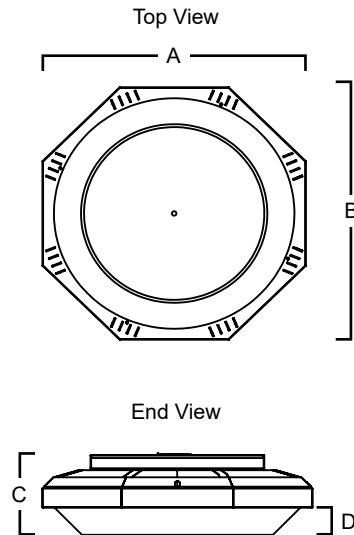

A	B	C	D
27"	27"	2 3/4"	8"

Consult installation guide for exact dimensions.

Note: All configurations may not be DLC qualified. Check www.designlights.org/QPL for qualified configurations.

