

Project:	Catalogue #:	Type:
Notes:		

Product Description

Specification-grade, surface-mounted row-mountable wrap-around luminaire. For use with applications where security and vandal are a primary consideration. This luminaire's narrow design, welded one-piece body and vandal-resistant lens make it ideal in hightraffic and vandal prone areas.

Applications

Canopies, Locker Rooms, Public Housing, Public Transit Areas, Security Lighting, Walkways

Features

- Vandal-resistant
- Narrow design
- Available with various lumen packages
- Clear prismatic polycarbonate diffuser
- Heavy-duty construction

Featured Options

- Emergency lighting battery pack
- Consult factory for other finishes

Optical System

Clear prismatic polycarbonate diffuser (0.125-in. thick) designed for high-efficiency and visual comfort.

Mounting

Mounting holes are provided. Mounts over electrical junction box. Flush mounting surface contains no offsets or exposed fastener heads.

Construction

Die-formed, 18-gauge steel housing assembly. Spot-welded for rigidity and clean appearance. Diffuser is retained by a grooved formation running the length of the fixture and is equipped with standard tamper-resistant fasteners. This luminaire is suitable for row-mounting. Flattened knockouts are provided on ends for through wiring.

Finish

White, polyester powder painted housing. High-reflectivity coated reflecting surfaces for improved efficiency.

Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours. Supplied with dimmable drivers(0-10v). Sufficient knockouts are provided for connections and through wiring.


Warranty

5 year limited warranty. For complete warranty, click here:




Approvals

- Approved to CSA/UL standards.
- Suitable for damp locations.

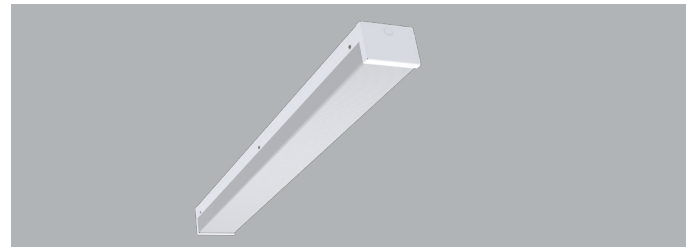

Dimensions

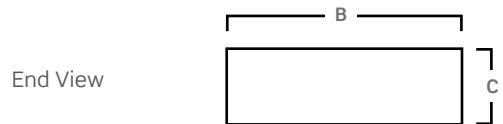


Size	A	B	C
24	24 1/2"	4 7/8"	3 15/16"
48	48 1/2"	4 7/8"	3 15/16"

Consult installation guide for exact dimensions.

Project:	Catalogue #:	Type:
Notes:		

Order Key

EXAMPLE: LTRB48-LED835K037LUNV

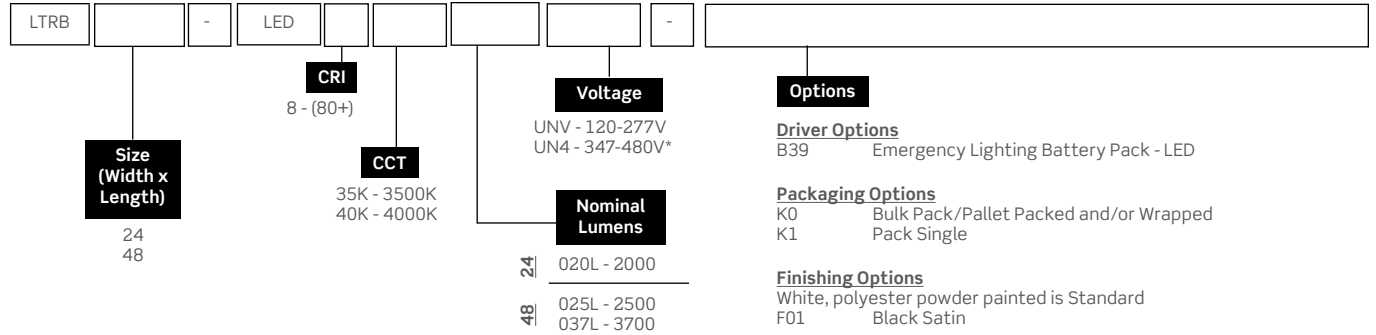

*Consult factory for lead times and availability
 Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data

LED Performance Data				
Size	Nominal Lumens	Delivered Lumens	Watts	Lumens Per Watt
24	2000	2024	15.8	128.2
48	2500	2546	18.8	135.4
	3700	3743	28.9	129.7

Values based on 840K with standard lens at 25C