

Project:	Catalogue #:	Type:
Notes:		

Product Description

Premium-grade, surface-mounted wrap-around valance luminaire. For use with indoor applications where contemporary styling and energy-efficiency are primary considerations. Regressed housing provides a floating appearance.

Applications

Corridors, Fitting Rooms, Locker Rooms, Stairwells, Utility Areas, Vanities



Features

- Available in 24 and 48 inch lengths
- White opal acrylic wrap-around diffuser
- Contoured sides provide a cloud-like floating profile
- Standard low voltage dimming (0-10V)

Featured Options

- Emergency lighting battery pack
- Consumer packaging

Optical System

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination.

Mounting

Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners. Offset mounting pads which keep luminaire level and slightly off of the mounting surface are formed within the housing. Mounts over electrical junction box.

Construction

Die and brake-formed, code gauge steel housing assembly. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is fastened in place on both ends.

Finish

Pre-painted, high-reflectance white housing.

Electrical

Long life LED's coupled with high efficiency drivers provide quality illumination. Supplied with dimmable drivers (0-10v). System efficacy of at least 100 lumens per watt for standard units. Rated to deliver L80 performance > 50,000 hours. Sufficient knockouts are provided for connections and through wiring.


Warranty

5 year limited warranty. For complete warranty, click here:





Approvals

- Approved to CSA/UL standards.

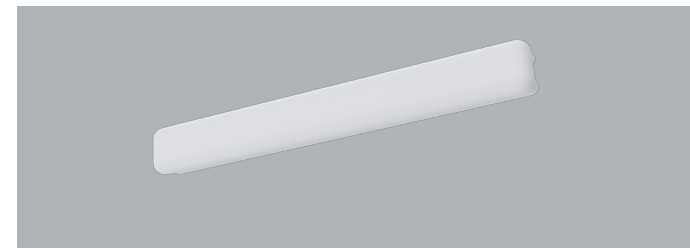

Dimensions

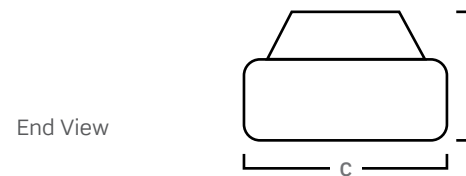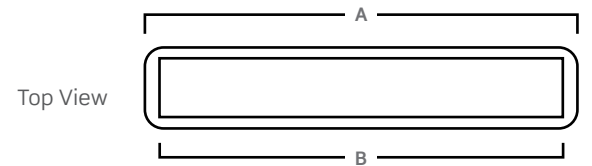

Size	A	B	C	D
24	26 3/4"	25 1/2"	6"	4 5/8"
48	50 3/4"	49 1/2"	6"	4 5/8"


Consult installation guide for exact dimensions.

Consult installation guide for exact dimensions.

Project:	Catalogue #:	Type:
Notes:		

Order Key

EXAMPLE: LWPRE48-LED835K033L120

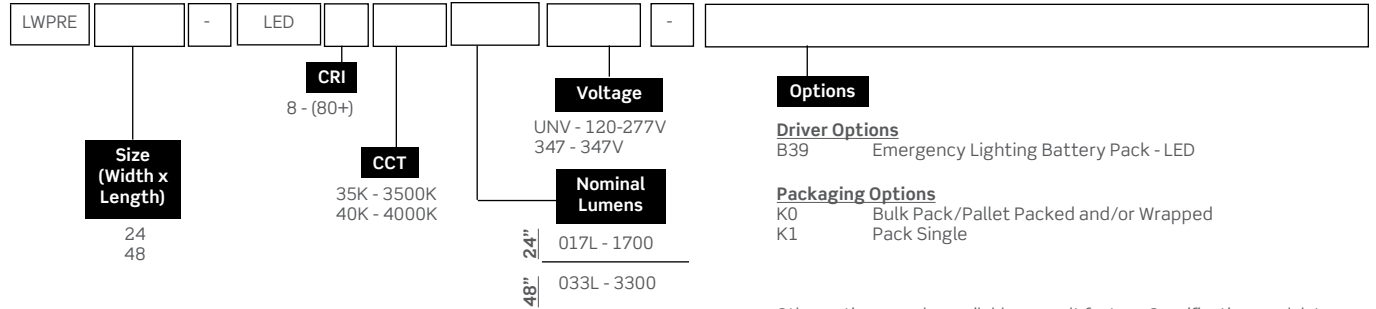

Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data

LED Performance Data				
Size	Nominal Lumens	Delivered Lumens	Watts	Lumens Per Watt
24	1700	1734	12.8	135.2
48	3300	3339	24.6	131.2

Values based on 840K with standard lens at 25C

Performance Scaling Factor

	50K	40K	35K	30K
80CRI	1.000	1.000	0.960	0.946
90CRI	0.875	0.875	0.836	0.809