

NOTES

- Installation should be completed by an individual familiar with the construction and operation of the luminaire.
- Installation of luminaire must be in accordance with nation and local building and electrical codes.
- Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
- Instructions do not cover all details and all possible product configurations
- Do not restrict luminaire ventilation.
- Ensure Lamps/ LED luminaire is not covered with material that will prevent convection or conduction cooling.
- Do not exceed luminaire's maximum ambient temperature.
- Ensure Lamps / LED luminaire has the correct polarity before installation.
- Do not mount the luminaire to ceiling if convenience outlet option is provided.
- Do not use the luminaire housing as junction box cover unless the housing width is wider than the junction box.

WARNINGS

Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.


Burn:

- Allow luminaire to cool before handling luminaire.

Personal Injury:


- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.

Viscor is not responsible for any injuries due to the improper installation or handling of its products.

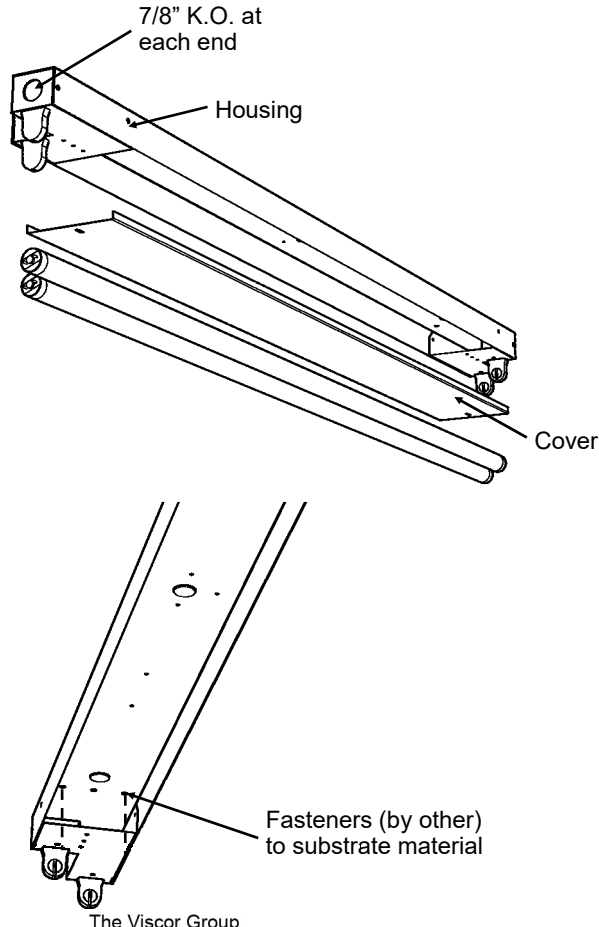

INSTRUCTIONS:

1. Carefully remove luminaire from packaging.
2. Remove the channel cover and lamps.
3. Connect ground wire from electrical supply to the ground wire on the luminaire. If no luminaire ground wire is present, attach the electrical supply ground wire directly to the ground screw located on the luminaire.
4. Connect electrical supply wires to the corresponding wires from the luminaire.
5. Place the channel cover back onto the channel and secure into place.
6. Install reflector (if provided).
7. If provided, mount speedy hanger onto luminaire, attach chains to speedy hanger and install chains onto structure.

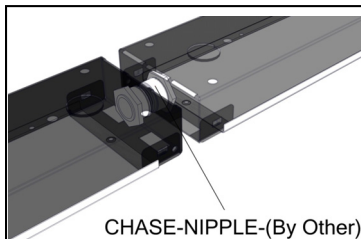

For Continuous Row Mounting:

Remove 7/8" knockouts from the end plates of the connecting ends of each luminaire. Thread chase-nipple (by others) through each of the 7/8" knockouts and secure in place using a nut. Insert wiring through the chase-nipple.