

Safety Instructions

NOTES

- Installation should be completed by an individual familiar with the construction and operation of the luminaire.
- Installation of luminaire must be in accordance with nation and local building and electrical codes.
- Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
- Instructions do not cover all details and all possible product configurations
- Do not restrict luminaire ventilation.
- Ensure Lamp/LED luminaire is not covered with material that will prevent convection or conduction cooling.
- Do not exceed luminaire's maximum ambient temperature.
- Ensure Lamp/LED luminaire has the correct polarity before installation.
- Do not mount the luminaire to ceiling if convenience outlet option is provided.
- Do not use the luminaire housing as junction box cover unless the housing width is wider than the junction box.

WARNINGS

Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- **Fixture should ONLY be powered on with access plate installed in fixture.**
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.
- Before powering up fixture, perform appropriate testing to ensure the fixture is properly grounded

Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.

Burn:

- Allow luminaire to cool before handling luminaire.


Personal Injury:

- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.

Viscor is not responsible for any injuries due to the improper installation or handling of its products.

Instructions

1. Carefully remove luminaire from packaging and make sure all parts are included.
2. Remove the channel cover.
3. Mount housing to surface using 2 - #8 wood or metal screw depending on the substrate material.
4. Connect ground wire from electrical supply to the ground wire on the luminaire. If no luminaire ground wire is present, attach the electrical supply ground wire directly to the ground screw located on the luminaire.
4. Connect electrical supply wires to the corresponding wires from the luminaire.
5. Place the channel cover back onto the housing and secure into place with fasteners provided.
6. Install lamps.

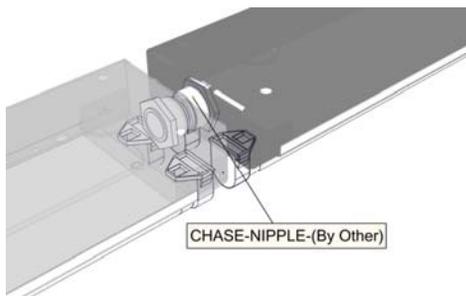

For Continuous Row Mounting:

Butt up the two end caps with chase nipple for .875 K.O (chase nipple by others). Ensure that the single .875 K.O. are on the same side facing each other (don't use the ends featuring the combo .625/.875 K.O)

